



6S27

6S27

DUPLEX-DIODE HIGH-MU TRIODE

SINGLE-ENDED METAL TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts

Current 0.15 amp.

Direct Interelectrode

Capacitances-Triode Unit (Approx.):^o

Grid to Plate 1.1 μf

Grid to Cathode 2.6 μf

Plate to Cathode 2.8 μf

^o with shell connected to cathode.

Mechanical:

Mounting Position Any

Maximum Overall Length 2-5/8"

Maximum Seated Length 2-1/16"


Maximum Diameter 1-5/16"

Bulb MT-8G

Base Small Wafer Octal 8-Pin

Basing Designation for BOTTOM VIEW 8Q

- Pin 1-Shell
- Pin 2-Triode Grid
- Pin 3-Cathode
- Pin 4-Diode Plate
No. 2



- Pin 5-Diode Plate
No. 1
- Pin 6-Triode Plate
- Pin 7-Heater
- Pin 8-Heater

TRIODE UNIT

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE 300 max. volts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode 90 max. volts

Heater positive with respect to cathode 90 max. volts

Characteristics - Class A₁ Amplifier:

Plate Voltage 100 250 volts

Grid Voltage -1 -3 volts

Amplification Factor 70 70

Plate Resistance (Approx.) 61000 58700 ohms

Transconductance 1150 1200 μmhos

Plate Current 0.8 1 ma.

Typical Operation - Resistance-Coupled Amplifier:

Same as type 6Q7 in RESISTANCE-COUPLED AMPLIFIER CHART

DIODE UNITS - Two


Consideration of these units, including typical circuits and diode curves is given at the front of this section. Diode biasing of the triode unit of the 6S27 is not suitable.

6SZ7



6SZ7

AVERAGE PLATE CHARACTERISTICS
TRIODE UNIT

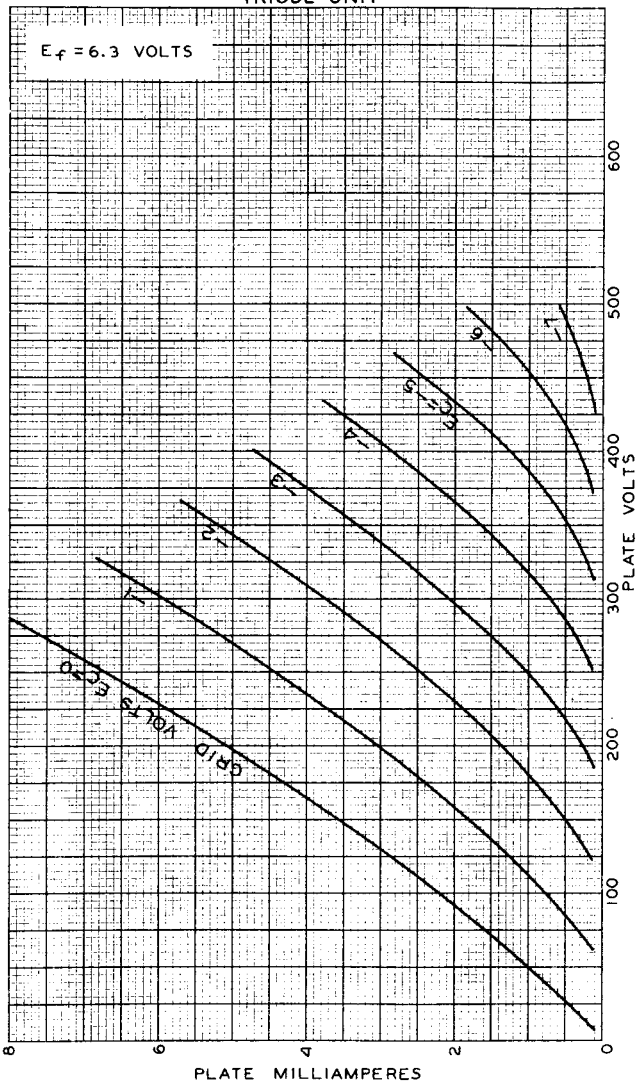

OCT. 3, 1945

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA HARRISON, NEW JERSEY

92CM-6602