



T.			U_f		I_f mA	U_a V	U_{g2} V	U_{g1} V	I_a mA	I_{g2} mA	S mA/V	R_i M Ω	$I_{a(diod.)}$ mA	I_k mA	P_a W	P_{g2} W
			V	V												
DAF 26	Tu	1	1,4	50	45	45	0	0,75	0,15	0,42	0,6	0,2	4,5	0,25	0,06	
DAF 91	eur	2	1,4	50												
DAF 92	eur	3	1,4	50												
1 AF 33	Tes	2	1,4	25												
1 AF 34	Tes	2	1,2	60	90	0	2	maximum	0,0175 ($\mu=14$)	0,25	2	0,2	0,25	0,03	0,01	
1 S 5 T	TuM	2	1,4	25												
DAF 96	eur	2	1,4	25	67,5	67,5	0	0,53	0,16	0,7	0,6	0,2	0,25	0,15	0,05	
DAF 191	RFT	2	1,4	50												
DAF 961 ¹⁾	RFT	2	1,2	60	90	67,5	0	2,2	maximum	0,7	0,6	0,2	2,5	0,15	0,05	
LV 10	Tlf	4	1,2	100												
1 AF 5	amer	2	1,4	25	67,5	90	0	0,7	0,25	0,5	2,3	0,2	0,2	0,6	0,2	
1 B 2 II	CCCP	2	1,2	30												
1 LD 5	int	1	1,4	50	110	45	0	1,1	0,4	0,6	2	0,7	0,1	0,15	0,2	
1 N 6-G	amer	5	1,4	50												
1 SB 6-GT	amer	6	1,4	50	90	67,5	0	1,45	0,38	0,665	0,7	0,5	0,3	0,9	0,7	

¹⁾ vide * 4

DAF 91 Fig. 3 ($R_{g1} = 1 \text{ M}\Omega$)

U_b	V	R_a	I_a	μ	h
		M Ω	μA	$U_{a\approx}/U_{g\approx}$	
45	45	0,22	85	9,5	2,5
45	45	0,47	45	10	3
67,5	67,5	0,22	170	10,5	0,9
67,5	67,5	0,47	85	11	1
90	90	0,22	270	11	0,6
90	90	0,47	140	11,5	0,7
120	120	0,22	380	11,5	1
120	120	0,47	200	12	0,5

DAF 91 Fig. 2 ($R_{g1} = 2 \text{ M}\Omega$)

U_b	V	R_a	R_{g2}	$I_a + I_{g2}$	μ	h
		M Ω	M Ω	μA	$U_{a\approx}/U_{g\approx}$	
45	45	0,47	1,8	70	38	4
45	45	0,47	2,2	60	37	5
45	45	1	3,9	40	42	5
45	45	1	4,7	30	40	8
67,5	67,5	0,47	1,8	125	50	1
67,5	67,5	0,47	2,2	115	50	1
67,5	67,5	1	3,9	60	55	3
67,5	67,5	1	4,7	55	55	2,5
90	90	0,47	1,8	170	56	1
90	90	0,47	2,2	160	57	1
90	90	1	3,9	85	60	2
90	90	1	4,7	80	64	1,7
120	120	0,47	1,8	260	60	3
120	120	0,47	2,2	240	66	1
120	120	1	3,9	115	66	1,8
120	120	1	4,7	110	70	1,5

T.	$C_{g1/f}$	$C_{a1/f}$	$C_{g1/a}$	$C_{aD/f}$	$C_{aD/g1}$	$C_{aD/aP}$
	pF	pF	pF	pF	pF	pF
DAF 91	2	2,8	0,4	1,5	0,1	0,9
DAF 96	1,8	2,7	0,3	1,1	0,03	0,9
ZD 17	2,2	2,4	0,2	1,4	0,5	0,45
1 AF 5	2,5	4,8	0,17			
1 AF 33	2,4	4,6	0,3	1,5		
1 AF 34	2,4	4,6	0,3	1,5		
1 B 2 II	1,85	2,1	0,27			
1 LD 5	3,2	6	0,18			

DAF 96 Fig. 3



U_b	V	R_a	R_{g1}	I_a	μ	h
		M Ω	M Ω	μA	$U_{a\approx}/U_{g\approx}$	
64	64	0,47	1	70	12	2
64	64	0,47	2,2	70	12,5	1,3
64	64	1	1	38	12	2,5
64	64	1	2,2	38	13	1,5
85	85	0,47	1	110	12,5	1
85	85	0,47	2,2	110	13	1
85	85	1	1	56	12,5	1,2
85	85	1	2,2	56	13,5	1,2

DAF 96 Fig. 2 ($R_a = 1 \text{ M}\Omega$; $R_{g2} = 2,7 \text{ M}\Omega$)


U_b	V	R_{g1}	I_a	I_{g2}	μ	h
		M Ω	μA	μA	$U_{a\approx}/U_{g\approx}$	
64	64	1	42	13	50	3,5
64	64	2,2	42	13	63	1,8
85	85	1	64	21	55	1,4
85	85	2,2	64	21	70	2,4

Equivalents


ZD 17	MOG = DAF 91
1 AH 5	amer = DAF 96
1 B 1 II	CCCP = 1 AF 34
1 FD 1	Maz = DAF 96
1 FD 9	Maz = DAF 91
1 S 5	amer = DAF 91
1 U 5	amer = DAF 92




1SB6-6




1N6-6




LV10







DAF92









DAF91









1LD5

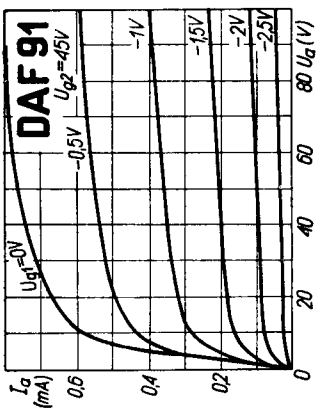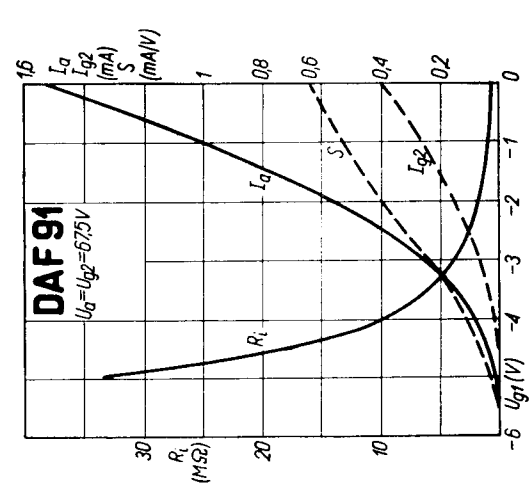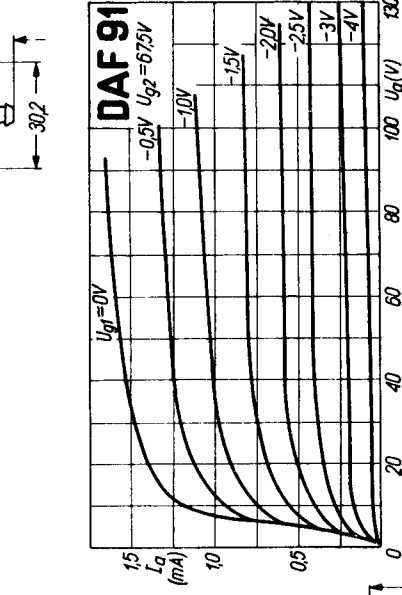

DAF91
DAF92
DAF96
1AF5
1AF33
162Π

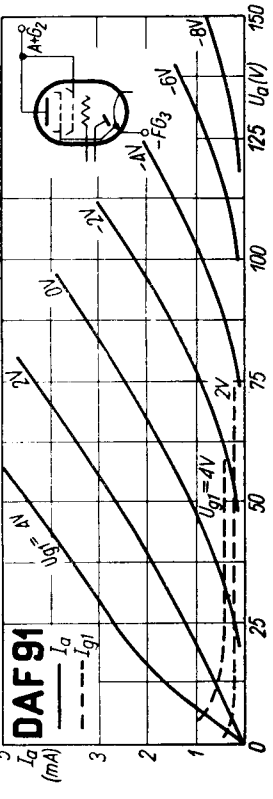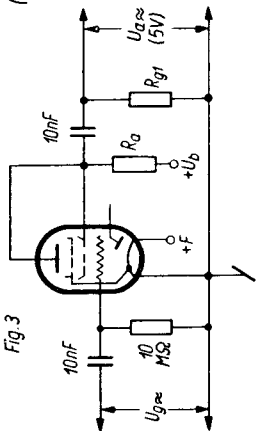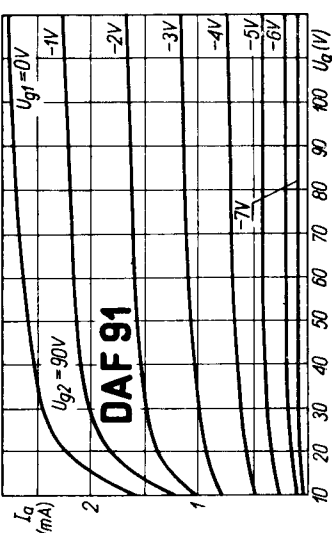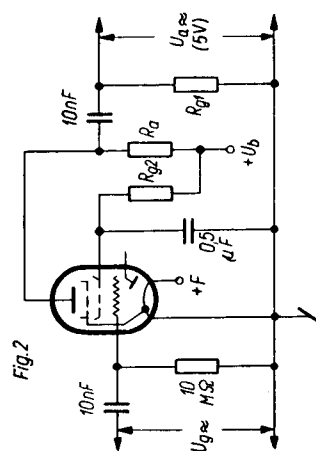

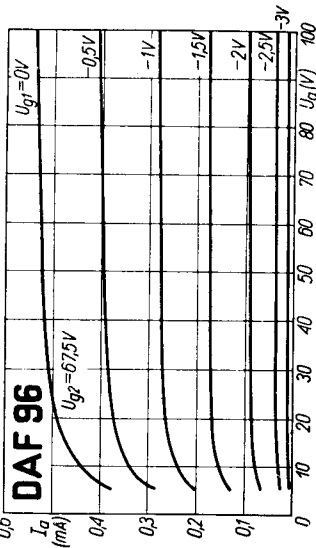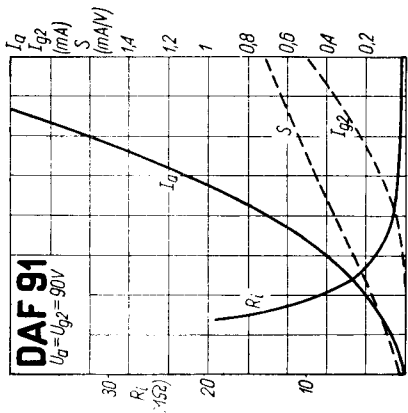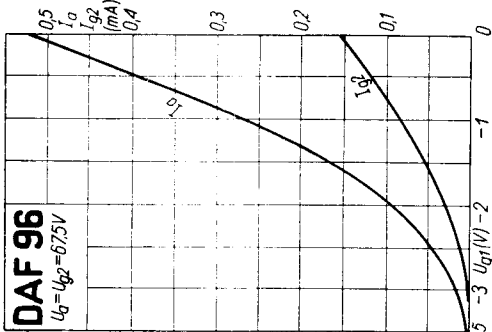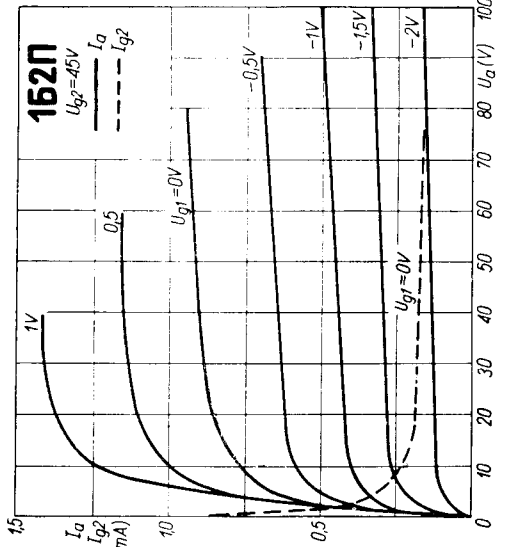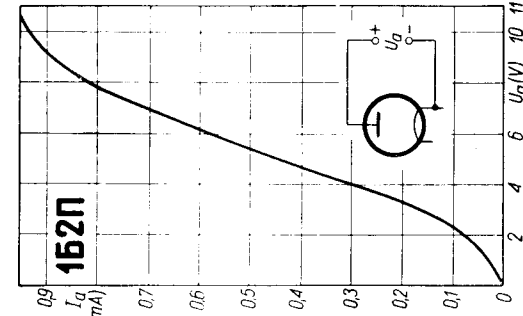

DAF191

