

## TENTATIVE DATA

### QUICK REFERENCE DATA

X-band, lightweight reflex klystron, with integral tuning cavity for local oscillator applications.

Frequency range 9.16 to 9.34 GHz

Power output 35 mW

Construction Aluminium body with flying leads

Output connection Waveguide 16 flange

Services type: CV6195

To be read in conjunction with  
GENERAL OPERATIONAL RECOMMENDATIONS - MICROWAVE DEVICES



**TYPICAL OPERATION (at 9.25GHz)**

**Operating Conditions (see note 1)**

Heater voltage	6.3	V
Resonator voltage	275	V
Reflector voltage	-85	V
Load v.s.w.r.	≤1.1:1	

**Typical Performance**

Resonator current	22	mA
Power output	35	mW
Electronic tuning range to 1/2 power points	30	MHz

**CATHODE**

**Indirectly heated**

Heater voltage	6.3	V
Heater current	0.45	A

**TEST CONDITIONS AND LIMITS**

The klystron is tested to comply with the following electrical specification.

**Test Conditions (see note 1)**

Heater voltage	6.3	V
Resonator voltage	275	V
Reflector voltage	Adjust	
Load v.s.w.r.	≤1.1:1	

**Limits and Characteristics**

	Frequency (GHz)	Min.	Max.	
Heater current	-	0.4	0.5	A
Resonator current	-	-	40	mA
Reflector voltage (see note 2)	9.16	-75	-100	V
	9.25	-75	-100	V
	9.34	-75	-100	V
Power output (see note 2)	9.16	25	60	mW
	9.25	25	60	mW
	9.34	25	60	mW
Electronic tuning range to 1/2 power points	9.16	25	-	MHz
	9.25	25	-	MHz
	9.34	25	-	MHz



## Limits and Characteristics (cont'd)

	Frequency (GHz)	Min.	Max.	
Reflector modulator sensitivity (see note 3)	-	0.5	1.5	MHz
Frequency pulling (see note 4)	-	-	6.0	MHz
Mechanical tuning rate	9.16 to 9.34	150	250	MHz/turn
Mechanical tuning torque	-	0.07	0.22	Nm
		-	0.7	(kg cm)
Mechanical tuning range	-	9.16	9.34	GHz
Frequency temperature coefficient (see note 5)	9.25	-50	-200	kHz/degC
Frequency modulation under vibration, peak acceleration = 10g at 30Hz to 1kHz	9.25	-	200	kHz peak
Mode separation (see note 6)	9.16 to 9.34	-50	-125	V

## RATINGS (ABSOLUTE MAXIMUM SYSTEM)

These ratings cannot necessarily be used simultaneously and no individual rating should be exceeded.

	Min.	Max.	
Heater voltage	5.7	6.9	V
Resonator voltage	-	350	V
Resonator current	-	45	mA
Reflector voltage (see note 2)	-20	-500	V
Body temperature (see note 7)	-	150	°C
Storage temperature	-55	+75	°C
v.s.w.r.	-	1.5:1	
Impedance of reflector/cathode circuit	-	500	kΩ

## END OF LIFE PERFORMANCE

The quality of all production is monitored by the random selection of klystrons which are then life tested under the stated test conditions. If the klystron is to be operated under different conditions from those specified, Mullard Ltd. should be consulted to verify that the life will not be affected. The klystron is considered to have reached the end of life when it fails to meet the following limits when operated as specified on pages 2 and 3.

	Min.	Max.	
Power output (at 9.25GHz)	15	-	mW
Electronic tuning range	20	-	MHz



MOUNTING POSITION

Any

COOLING

Natural

PHYSICAL DATA

	g	oz	
Weight of klystron	92	3.25	
Dimensions of storage carton	120 × 120 × 145		mm

NOTES


1. Tests are made with the klystron rigidly connected to and in good thermal contact with a UG-39/U flange on an RG-52/U (WG16) waveguide.
2. Reflector voltage adjusted for the maximum power point of the mode. The reflector voltage must never be allowed to fall below the minimum value specified in the ratings.
3. Measured at mode optimum, 1 volt peak to peak deviation.
4. Measured with a v.s.w.r. of 1.5:1 varied through all phases. The power output must not be less than 10mW and the frequency versus reflector voltage must be continuous between the half power points.
5. Measured over the ambient temperature range -50 to +70°C.
6. No mode or part of a mode other than the required mode will exist within the specified reflector voltage range as the valve is mechanically tuned over the complete frequency range.
7. Measured at the point indicated on the outline drawing. For maximum valve life the klystron should be operated at temperatures below the specified maximum.

Dimensions  
(Rounded outwards)

mm	in	mm	in
1.5	0.059	32.5	1.279
∅ 4.3	∅ 0.169	36.5 max.	1.437 max.
9.3 ± 0.5	0.366 ± 0.020	41.5 max.	1.634 max.
27 max.	1.06 max.	54 max.	2.13 max.
28.5 max.	1.122 max.	66 max.	2.60 max.
31	1.22	200 min.	7.87 min.
32 max.	1.26 max.		



## OUTLINE DRAWING

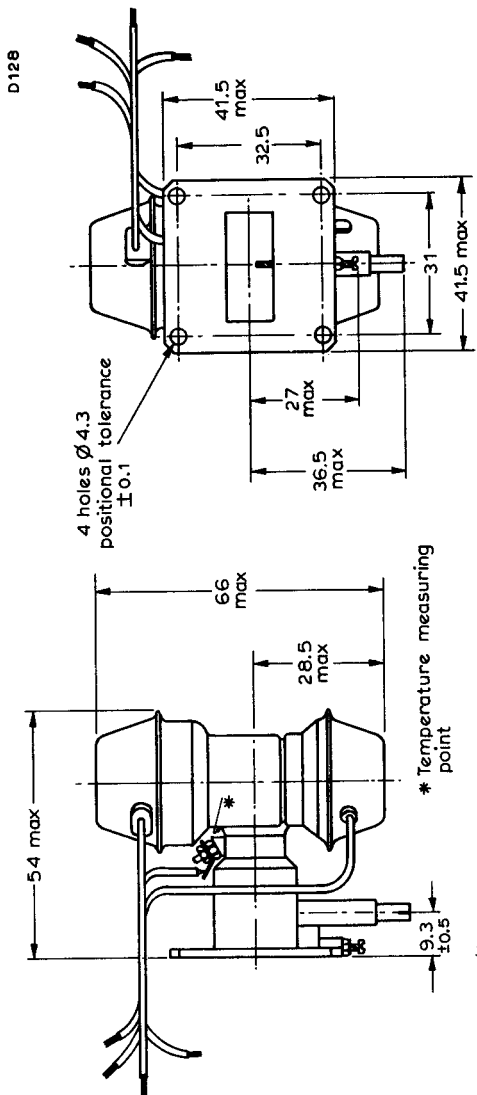

Outlet via waveguide RG-52/U (WG16) to take bolted flange choke coupling UG-39/U

LEAD COLOUR CODE	
WHITE	HEATER & CATHODE
YELLOW	HEATER
GREY	REFLECTOR
BROWN	RESONATOR

All dimensions in mm

